

Totara

Fireplace Insert Low Emission
Approved Burner - With Inset Flue Kit

FIND A RETAILER

BOOK ASSESSMENT


Designed with you in mind.
Real human-focused features.

USER FRIENDLY AND EASY TO MAINTAIN

The Totara's design is ergonomic and promotes cost-effective ease of use.

EASY SERVICE

The simple baffle removal system ensures easy servicing for chimney sweeps.

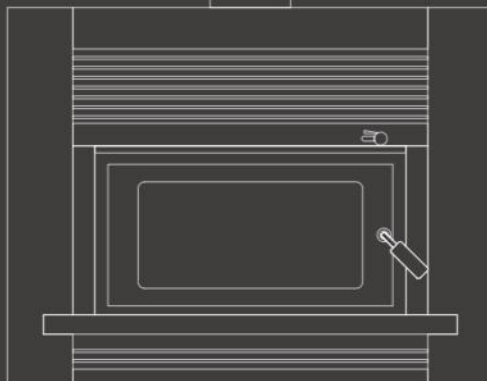

33L

FIREBOX
CAPACITY

2 log

FIREBOX
CAPACITY

6mm

STEEL
FIREBOX



Dimensions	650H x 840W x 62D	
Weight	90 kg	
Clean Air Approval	NES	
Floor Protector	8mm Ceramic Tiles	
Max. Log Length	450 mm	
Approx No. Logs	Up to 2	
	High	Low
Average Heat Output	7.3 kW	4.7 kW
Fuel Consumption Rate	2.26 kg/h	1.13 kg/h
Room Heating Efficiency	57.5%	75.2%
	Firebox	Parts
Warranty	15 years	1 year

The Totara requires no electrical installation, no additional components and no complex operating requirements.

← FEATURES

SPECIFICATIONS